


MAXIMO 973M

Zinc Oxide



Product
specification

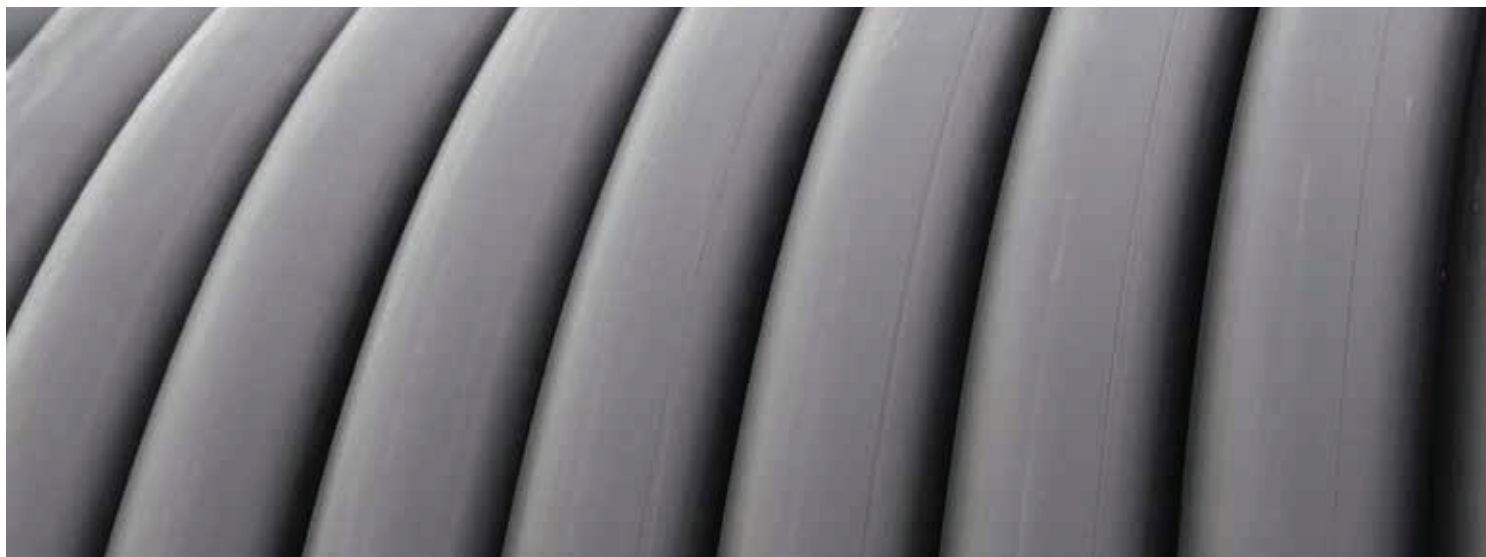

MAXIMO 973M

Zinc Oxide



RUBBER

Zinc oxide is a critical component that activates and accelerates the vulcanization process of tire manufacturing and rubber compounding.

Many characteristics in rubber are attributed to zinc oxide, such as: thermal properties, mold shrinkage, mold cleanliness, tire abrasion and wear resistance, ultraviolet light protection and processability.



Typical Chemical Analysis

Purity	99.3 %	Minimum
Zinc (Zn)	79.8 %	Minimum
Lead (Pb)	0.023 %	Maximum
Iron (Fe)	0.020 %	Maximum
Cadmium (Cd)	0.007 %	Maximum
Chlorine (Cl)	0.10 %	Maximum
Sulfur (S)	0.40 %	Maximum
Surface Area	4.0 – 6.0	m ² /gr
Specific Gravity	5.6	

Packaging:

Bag: 50 lb

Big Bag: 2500 lb



CORPORATE OFFICE

Serafín Peña 938 Sur, Centro
Monterrey, N.L., México, Zip Code 64000
Phone: +52(81)8342 6861, 8345 4078
sales@gpromax.com

METALLURGICAL PLANT

Pedro Galindo 101, Lomas del Roble,
San Nicolás de los Garza
N.L., México, Zip Code 66450
Phone: +52(81)8376 5024, 8376 5783
purchase_metalurgica@gpromax.com
sales_metalurgica@gpromax.com

SDR

13209 Highway 96
Millport, Alabama, USA, Zip Code 35576
Phone: 1(205)662 8801
Fax: 1(205)662 8802
aleyva@steeldust.com
fmontemayor@steeldust.com

DISTRIBUTION CENTER

Boulevard Benito Juárez 23
Bodega No.9, San Mateo Cuautepec
Tultitlán, Estado de México, Zip Code 54948
Phone: +52(55)5705 0197, 5705 0203
sales@gpromax.com

TURKMEX

Çoraklar Mahallesi,
5012 Sokak, No.43, 35800
Aliağa OSB (İzmir-Çanakkale E87 Karayolu
67.km), Aliağa / İzmir / TÜRKİYE
Phone: +90(850)622 6030, 232 621 5300
infotmx@turkmex.com.tr

GSDK

23, Yulchonsandan 2-ro,
Haeryong-myeon, Suncheon-si,
Jeonnam, South Korea
Zip Code 58035
Phone: +82(61)740 2700
info@gsdkorea.com

TOLL FREE CALLS
FROM WITHIN THE US:
1 855 268 4664